


Quick start guide

TL92271/TL92371/TL92471

This quick start guide provides you with basic instructions only. For more complete instructions, refer to your user’s manual provided in the package, or see the online user’s manual at www.telephones.att.com/manuals.

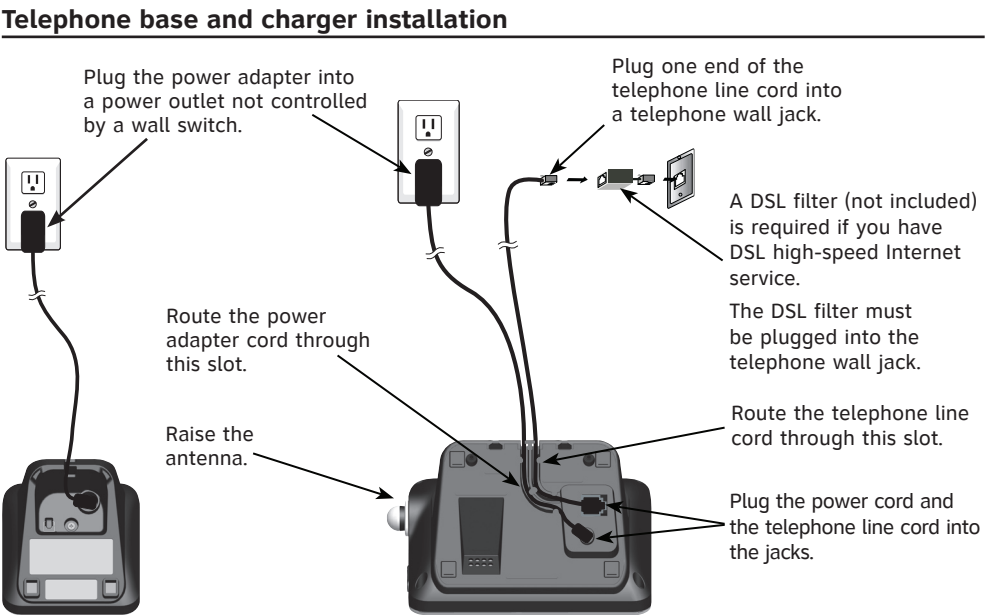

Caution: Use only the power adapter provided with this product. To obtain a replacement, visit our website at www.telephones.att.com or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.

Battery installation

Install the battery as shown below. Charge your handset(s) before initial use. The battery is fully charged after 16 hours of continuous charging.



Bluetooth setup

The following are a few common Bluetooth features to set. Refer to the **Bluetooth setup** section in the user’s manual provided in the package for more details.

When you pair a Bluetooth cell phone or Bluetooth headset to the telephone base, keep the device within 15 feet of the telephone base for optimal performance.

Add a cell phone
To pair and connect a cell phone using a cordless handset: 1. MENU -> ▼ or ▲ -> Bluetooth -> SELECT . 2. SELECT to select Add device . 3. ▼ or ▲ -> Add cellular -> SELECT . 4. Disconnect the cell phone from any Bluetooth device -> NEXT . 5. Place the cell phone next to the telephone base. 6. NEXT to turn on the telephone base discoverable mode. 7. Turn on the Bluetooth feature of your cell phone and search for or add new advices. 8. Enter the cell phone passcode (typically 0000) if required -> SET . 9. Enter the PIN (default PIN: 0000) of the telephone base into your cell phone.
Add a headset
To pair and connect a headset using a cordless handset: 1. MENU -> ▼ or ▲ -> Bluetooth -> SELECT . 2. SELECT to select Add device . 3. ▼ or ▲ -> Add headset -> SELECT . 4. Disconnect your headset from any Bluetooth device -> NEXT . 5. Set your headset to discoverable mode -> NEXT . 6. ▼ or ▲ to choose your headset -> SELECT . 7. Enter the PIN (typically 0000) of your headset and press NEXT .
Download directory
Before downloading a directory, make sure the cell phone is paired, active, and connected to your TL92271/TL92371/TL92471 . To download a cell phone directory using a cordless handset. 1. MENU -> ▼ or ▲ -> Bluetooth -> SELECT . 2. ▼ or ▲ -> Download dir -> SELECT . 3. ▼ or ▲ -> to select the desired device if necessary -> SELECT . 4. ▼ or ▲ -> Phone memory, SIM card only or Phone and SIM -> SELECT . 5. Enter the cell phone passcode if necessary, then press SET . 6. Press OK to return to the Bluetooth menu when the download is complete.

Telephone operation

Operation	Steps
Making a call	To make a home call Press HOME or)/SPEAKER -> Enter the telephone number. To make a cell call Press CELLULAR -> Enter the telephone number -> DIAL .
On-hook dialing (predialing)	To predial a home call Enter the telephone number -> Press HOME or)/SPEAKER to call. To predial a cell call Enter the telephone number -> Press CELLULAR to call.
Answering a call	To answer a home call Press HOME or)/SPEAKER . To answer a cell call Press CELLULAR .
Ending a call	To end a home call Press OFF or put the handset to the telephone base or charger. To end a cell call Press OFF or put the handset to the telephone base or charger.
Handset speakerphone	During a call, press)/SPEAKER to switch between handsfree speakerphone and normal handset use.
Redial	To dial a redial entry using the home line Press REDIAL repeatedly to select the desired entry -> HOME or)/SPEAKER to call. To dial a redial entry using the cell line Press REDIAL repeatedly to select the desired entry -> CELLULAR to call.
Volume control	Press VOLUME▼ to decrease or press VOLUME▲ to increase the listening volume during a call.
Call waiting (Requires subscription from telephone service provider)	On home line Press FLASH to put current call on hold and to take the new call; press again to switch back and forth between calls. On cell line Press CELLULAR to put current call on hold and to take the new call; press again to switch back and forth between calls. -OR- Press SWAP to switch. To switch back, press OPTION -> ▼ or ▲ to highlight Swap -> SELECT .

Caller ID

This product supports caller ID services offered by most telephone service providers. The telephone stores caller ID information of the last 50 incoming calls in the telephone base. This information is common to all devices.

Missed call indicator
When a handset is in idle mode and has new or missed calls, its screen shows XX Missed calls . You can erase the missed call indicator either by reviewing the call log one by one, or by <u>pressing and holding</u> CANCEL on the handset in idle mode.
Review and dial a number in the call log
1. CID in idle mode -> ▼ or ▲ to select the desired line -> REVIEW . 2. ▼ or ▲ to scroll through the list. 3. HOME or)/SPEAKER to dial with the home line. -OR- CELLULAR to dial with the cell line.
Caller ID announce
When this feature is on and you have an incoming call, the handset and/or base speaks “ <i>Call from...</i> ” and the name of the caller based on the directory or caller ID information. You can turn this feature off for the base or each individual handset, or both. 1. MENU -> ▼ or ▲ -> Settings -> SELECT . 2. ▼ or ▲ -> Caller ID Annc -> SELECT . 3. ▼ or ▲ to choose Handset or Base -> SELECT . 4. ▼ or ▲ to choose On or Off -> SET .

Directory

The home directory can store up to 200 entries, which are shared by all system devices.

Operation	Steps
Adding an entry in the home directory	1. MENU . 2. ▼ or ▲ -> Directory -> SELECT . 3. OPTION to select Home 4. SELECT to select Add contact . 5. Enter a telephone number up to 30 digits -> SELECT . 6. ▼ or ▲ to select Home, Cell, Work or Other -> NEXT . 7. Enter a name up to 15 characters -> SAVE .
Searching/dialing an entry	1. DIR in idle mode -> ▼ or ▲ to select the desired line -> REVIEW . 2. Press ▼ or ▲ to browse through the directory, or press the dialing keys (0-9) to start a name search. 3. Press HOME or)/SPEAKER to call using the home line. -OR- Press CELLULAR to call using the cell line.

Answering system

About answering system and voicemail

Your telephone has separate indicators for two different types of voice messages: those left on the built-in answering system and those left at your telephone service provider's voicemail. To listen to messages recorded on the built-in answering system, refer to the **Message playback** section below; to listen to voicemail, contact your telephone service provider for more information.

Turn answering system on/off

The answering system must be turned on to answer and record messages.

Using the telephone base:

Press **)/ANS ON** to turn the answering system on or off. If the answering system is turned on, it announces, *"Calls will be answered."* If the answering system is turned off, it announces, *"Calls will not be answered."*

Message alert tone

When this feature is on, and there is at least one new message, the telephone base beeps every 10 seconds.

- MENU** -> ▼ or ▲ -> **Answering sys** -> **SELECT**.
- ▼ or ▲ -> **Ans sys setup** -> **SELECT**.
- ▼ or ▲ -> **Msg alert tone** -> **SELECT**.
- ▼ or ▲ -> choose **On** or **Off** -> **SET**.

Call screening

Use this feature to choose whether incoming messages can be heard over at telephone base when they are being recorded. If you turn call screening on, you hear the incoming message at the telephone base. While monitoring an incoming message, you can answer the call by pressing **HOME** or **)/SPEAKER** on the handset.

- MENU** -> ▼ or ▲ -> **Answering sys** -> **SELECT**.
- ▼ or ▲ -> **Ans sys setup** -> **SELECT**.
- SELECT** to select **Call screening**.
- ▼ or ▲ -> choose **On** or **Off** -> **SET**.

Message playback

Using the telephone base:

Press **►/■/PLAY** when the telephone base is in idle mode.

Using a handset:

- MENU**.
- SELECT** to select **Play messages**.

Options during playback

Feature	On the telephone base	On a handset
Adjust playback volume	Press ▼/VOLUME/▲	Press ▼VOLUME or ▲VOLUME
Stop playback	Press ►/■/STOP	Press OFF
Skip to the next message	Press ►/SKIP	Press SKIP
Repeat the message	Press ◀/REPEAT	Press REPEAT
Play the previous message	Press ◀/REPEAT twice	Press REPEAT twice
Delete the message	Press X/DELETE	Press DELETE

For more detailed instructions, please refer to the **TL92271/TL92371/TL92471 DECT 6.0 cordless telephone/answering system with BLUETOOTH® wireless technology** user’s manual provided in your package, or see the online user’s manual at **www.telephones.att.com/manuals**.

For customer service or product information, visit our website at **www.telephones.att.com** or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.

The *Bluetooth®* word mark and logos are owned by Bluetooth SIG, Inc. and any use of such marks by Advanced American Telephones and its parent, VTech Holdings Limited, is under license. VTech Holdings Limited is a member of Bluetooth SIG, Inc. Other trademarks and trade names are those of their respective owners.